



MORSETTI CLAMPS




267.612.177 (Ø22 1/2)
267.612.1 (Ø20)



267.612.17 (Ø22 1/2)
267.612.17 20 (Ø20)



267.612.178

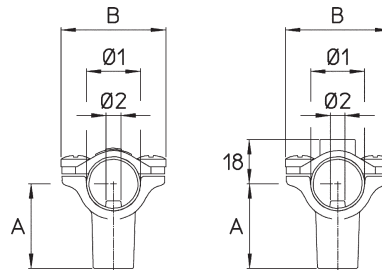

Standard nichelati - completi di viti inox e O Ring

Pressione di esercizio max.: 50 bar

Peso: 267.612.1 65 g (2.3 oz) - 267.612.177 62 g - 267.612.17 70 g - 267.612.17 20 70 g - 267.612.178 67 g - 267.612.18 75 g

Materiali: ottone nichelato - acciaio inox - NBR

Impiego: su gruppi da diserbo ed atomizzatori. Leggeri e resistenti consentono il montaggio di getti, ugelli e manometri.

Standard nickel plated with stainless steel screws and O Ring


Max. operating pressure: 50 bar (725 psi)

Weight: 267.612.1 65 g (2.3 oz) - 267.612.177 62 g (2.2 oz) - 267.612.17 70 g (2.5 oz) - 267.612.17 20 g (2.5 oz)
267.612.178 67 g (2.4 oz) - 267.612.18 75 g (2.6 oz)

Materials: nickel plated brass - stainless steel - Buna N

Use: for agriculture use on booms and air blast sprayers. Light and resistant. For nozzles, spray tips and pressure gauges.

COME SI ORDINA / HOW TO ORDER

CODICE code	Ø1 mm	Ø2 mm	FILETTATURA thread	FILETTATURA CAVALLOTTO clamp thread	A mm	B mm	
267.612.1	Ø20	Ø7	G1/4F. 1/4" BSPF.	-	275	42	10
267.612.177	Ø22 - Ø21.3			-	275		
267.612.17	Ø22 - Ø21.3			-	35		
267.612.17 20	Ø20			-	35		
267.612.178	Ø22 - Ø21.3			M8	275		
267.612.18	Ø22 - Ø21.3	M8	35				



GETTI
NOZZLES



CATALOGHI
CATALOGUES



RICAMBI
SPARE PARTS :

267.612.1
267.612.17
267.612.17 20

267.612.18
267.612.177
267.612.178